

Caprice Classic Four Door Sedan

Standard Equipment Summary:

- 4.3 Liter V8 engine with SFI
- 4-Speed electronic automatic overdrive transmission
- 2.93 axle ratio
- Air Conditioning with environmentally friendly refrigerant, (R134A)
- All-season steel-belted radial ply tires (P215/75R-15 blackwall)
- Brakes: Four-wheel anti-lock system (front disc/rear drum)
- Brake transmission interlock
- Power Steering
- Stainless steel exhaust
- 15" x 7" steel wheels
- Full Wheel Covers
- Full Frame
- Base-coat/clear-coat paint
- Wide Body-side moldings
- Composite quartz-halogen headlamps with replaceable bulbs
- Dual rear-folding outside mirrors (LH remote)
- Tinted Glass
- Wet-arm windshield washer system
- Intermittent windshield wipers
- Comfortilt steering wheel
- Cloth 55/45 front seat with center armrest
- Scotchgard™ Fabric Protector Seats & Carpeting
- Full Carpeting
- Carpeted floor mats, front and rear
- Full trunk trim
- Driver and passenger side Supplemental Inflatable Restraint system (air bags), manual lap/shoulder safety belts for all outboard seating positions; manual lap safety belts, center seating positions.
- Side-guard door beams
- Energy absorbing steering column
- Power door locks
- Child security rear door locks
- Pass-Key Theft Deterrent (N/A with Police Package)
- Electric digital speedometer with trip odometer, gauges, oil change and low oil indicators.
- Headlamps-on, seat-belt and key reminder tone
- AM/FM stereo radio with seek-scan, digital clock, dual front door mounted and dual rear mounted speakers
- Delayed illumination entry system
- Underhood lamp
- Glove box lamp
- Luggage compartment lamp

Caprice Classic Police Package

To order Caprice Classic Police Package, model 1BL19 and Base Equipment Group 1SAX plus 9C1 must be ordered. Additional RPO and SEO options may be ordered, see option pages in this section.

9C1 Features Include:

The following equipment is in addition to or replacing items included in the standard equipment summary.

- Heavy duty full perimeter frame
- 3.23 Performance axle with 8.5" ring gear
- Special Police Pursuit Suspension includes front and rear stabilizer bars, special springs and shocks, firm-feel steering, and specific body mounts
- Tires, P225/70R15 SBR Blackwall "Speed Rated" All Season with full size spare tire. See tire chart for tire availability
- Front and Rear disc brakes with ABS and semi-metallic brake pads
- Cooling Package, includes transmission oil cooler integral with radiator and dual electric fans. External air-to-oil (KD1) is included when 5.7L V8 is ordered
- Engine oil cooler (external)
- Power steering fluid cooler (external)
- Hoses - silicon radiator and heater; includes worm drive hose clamps
- Delcotron 140 amp Alternator (See specifications section)
- Maintenance Free 770 CCA heavy-duty battery (See specifications section)
- Special calibrated transmission (use overdrive for high speed driving)
- Transmission Low Gear Blockout (prevents manual downshift to first gear)
- Wiring Provision to permit installation of a customer furnished headlamp flashing system. Wiring Provision 6J3 must be ordered to get a headlamp flashing system control wire from flasher unit to vehicle interior.
- 15 x 7 Heavy Duty Steel Wheels
- Bolt on center hub caps
- Special Balanced Drive Shaft
- Air Conditioning wide open throttle cut-off
- Air Conditioning head pressure relief
- Digital Speedometer Certified 1 MPH increments 0 to 199 MPH, includes: Trip Odometer, Gauges (Oil, Temp, Volts) plus Warning Lights and off switch for Speedometer light
- Trunk Opener, electric, left-side of steering column near headlight switch
- Single Key Locking System - random key code for each vehicle; one key operates ignition and all other locks. (For single key to operate entire fleet, see Fleet Coded Single Key Locking System on page 5).
- Heavy duty 45/45 Front Bucket Seats with minimum spacing between seats of 9" and H/D bench rear seat
- Anti-Corrosion Hot Melt Pads under front and rear floor insulators
- Radio Bonding Strap Package
- Wiring Provision for Horn/Siren Circuit Connection
- Auxiliary Junction Block in engine compartment
- Auxiliary Fuse Block provides six additional fused circuits at 20 amps each

Note: For detailed description of Special Equipment Options see Illustrations section.

Caprice Classic Police Package with Custom Interior

To order Caprice Classic Police Package with Custom Interior, model 1BL19 and base equipment group 1SAX plus 9C1 and Option B18 must be ordered.

Note: Special paint, and heavy duty seats are not available with Custom Interior B18.

- Power Driver Seat (AG1)
- Power windows with driver express down and passenger windows lockout (AA7)
- Power LH and RH outside mirrors (DE3)
- Door-mounted courtesy lamps (C71)
- Luggage compartment area hold-down net (AP9)
- LH Visor with covered mirror (DD2) (RH Visor with covered mirror standard)

Powertrain Combinations

Powertrains Available (must order one)

ENGINE				TRANSMISSION		AXLE	
OPTION	TYPE	DISPLACEMENT LITERS/CU. IN.	FUEL SYSTEM	OPTION	TYPE	OPTION	RATIO
L99 Single Exhaust Standard	V8	4.3/265	Sequential Fuel Injection	MXO	4L60E Electric 4-speed Auto w/OD	GU5	*3.23
L99 Bi-Fuel KL6 Optional	V8	4.3/265	Primary Natural Gas Secondary Gasoline	MXO	4L60E Electric 4-speed Auto w/OD	GU5	*3.23
LT1 Dual Exhaust Standard	V8	5.7/350	Sequential Fuel Injection	MXO	4L60E Electric 4-speed Auto w/OD	GU4	*3.08

* Limited slip is available with these axles by ordering option G80.

See specifications section for powertrain information.

Note: Police Package is only available with Federal Emissions (FE9).

Tires: Speed Rated (must order one)

INCLUDED with 9C1 Police Package

OPTION	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
5AQ & R4Y	Goodyear	Five	P225/70R15 SBR Blackwall	H	All Season (Eagle GT + 4)
5AQ & R4Z	General	Five	P225/70R15 SBR Blackwall	H	All Season (XP2000AS)

Note: Pending successful completion of tire testing and evaluation, the P225/70R15 "H" rated tire may be upgraded during the model year by a P225/70R15 "V" rated tire at no extra charge.

OPTIONAL with 9C1 Police Package

OPTION	MANUFACTURER	QUANTITY	SIZE	SPEED RATING	TYPE
QQG & R4Y *	Goodyear	Five	P235/70R15 SBR Blackwall	V	All Season (RSA)
QQG & R4Z *	General	Five	P235/70R15 SBR Blackwall	V	All Season (XP2000V4)
QQR*	Goodyear	Five	P235/70R15 SBR White Stripe	V	All Season (RSA)
5AN	General	Five	P225/70R 15 SBR White Stripe	H	All Season (XP2000AS)

* Required with LT1 (5.7L) Engine. If P225/70R15 tires are ordered with the LT1 (5.7L) Engine, option VZ2 Speed Limiter (130 mph) is required.

Note: Speed ratings at 35 psi; 'H' rating 130 mph, 'V' rating 147 mph.

Seats:

Caprice Classic Police Package

Heavy Duty Seats-Front and Rear

Not available with Custom Interior

SEAT		VINYL (FRONT/REAR)		CLOTH (FRONT/REAR)		CLOTH-FRONT VINYL-REAR		POWER SEATS AVAILABLE
TYPE	OPTION	COLOR	CODE	COLOR	CODE	COLOR	CODE	*
Bucket 45/45 w/reclining seat back	AS7	Med. Blue	30NX	Med. Blue	30EX	Med. Blue	30DX	Driver (AG1) and Passenger (AG2)
		Med. Beige	64NX	Med. Beige	64EX	Med. Beige	63DX	
		Ruby	79NX	Ruby	79EX	Ruby	79DX	
		Gray	14NX	Gray	14EX	Gray	14DX	
Split 55/45 w/armrest, reclining seat back	AM6	Med. Blue	30NX	Med. Blue	30EX	Med. Blue	30DX	
		Med. Beige	64NX	Med. Beige	64EX	Med. Beige	64DX	
		Ruby	79NX	Ruby	79EX	Ruby	79DX	
		Gray	14NX	Gray	14EX	Gray	14DX	
Full Bench Rear		Heavy-Duty Rear Seat is included when Heavy-Duty Front Seat is Ordered						
		Color Selected for Front Seat Determines Rear Seat Color						

* AA7 Power Windows are required with AG1 Driver Power Seats. Passenger Power Seat AG2 Requires AG1 and is not available with conduit 6C9.

Note: Seat Option and Color Code must be specified.

Caprice Classic Police Package with Custom Interior B18

Seats and Trim will be the same as Retail Caprice Classic

SEAT		CLOTH (STANDARD)		LEATHER (OPTIONAL)		POWER SEATS AVAILABLE
TYPE	OPTION	COLOR	CODE	COLOR	CODE	
Split 55/45 w/armrest reclining seat back	AM6	Med. Blue	30CX	Dark Blue	302X	Driver (AG1) Standard and Passenger (AG2) Optional
		Med. Beige	64CX	Beige	642X	
		Gray	14CX	Gray	143X	
		Ruby	79CX	Ruby	792X	

Note: Seat Option and Color Code must be specified.

Special Equipment Options

For Detailed Descriptions of Special Equipment Options, see illustrations section.

No.	Description	Caprice Classic	B18 Option
6F8	ASHTRAY - Auxiliary, located in front doors	O	N/A
K16	BI-FUEL NATURAL GAS CONVERSION - (Reqs. 3.23 axle and P225/70R15 tires)	O	N/A
6C9	CONDUIT - Routed from dash to trunk. Requires 6A3 (N/A with AG2 Power Seat)	O	N/A
KD1	COOLER - Auxiliary external transmission oil (included with 5.7L engine)	O	O
6A3	COVERING - Rubber floor replaces production carpeting (N/A with carpeted mats)	O	N/A
6N1	HANDLE - Inside driver door releases lock when opening door	O	O
6B2	HANDLES - Rear door inoperative (doors can be opened only from outside)	O	O
6N5	HANDLES - Rear window inoperative	O	O
6B7	HOLE IN ROOF - On centerline (Reqs. 6F5 wiring) N/A with 6J5 hole	O	O
6J5	HOLE IN ROOF - On right side (Reqs. 6F5 wiring) N/A with 6B7 hole	O	O
6A4	KEYS - Single key system, each vehicle coded different (Standard with police package)	S	S
6A5	KEYS - Single key system, entire fleet coded alike (specific key code)	O	O
6F2	KEYS - Single key system, entire fleet coded alike (specific key code)	O	O
6E8	KEYS - Single key system, entire fleet coded alike (specific key code)	O	O
6C7	LAMP - Front Auxiliary dome	O	O
7Y2	LAMP - Door open warning (N/A with 7Y6 dome lamp inoperative)	O	N/A
7Y6	LAMP - Inoperative dome (N/A with 7Y2 door open warning)	O	O
6J6	LIGHTS - Rear window shelf auxiliary Stop/Turn signals	O	O
153	LIGHTS - Alternate Flashing Trunk Lid Warning	O	O
6N6	LOCKS - Rear door inoperative	O	O
B42	MAT - Rubber trunk	O	O
B81	MOLDING DELETE - All Body side	O	N/A
6Y1	MOLDING NON-INSTALLED - Body side, front doors only	O	O
6G2	ROOF REINFORCEMENT- Plate located on centerline of vehicle	O	O
8X3	SHOCKS - Bilstein (replaces production shocks)	O	O
VZ2	SPEED LIMITER - Required with 5.7 Liter engine when P225/70R15 tires are ordered	O	O
7X6	SPOTLIGHT - Left hand	O	O
7X7	SPOTLIGHTS - Left and right hand	O	O
7X8	SPOTLIGHT PROVISION - Left hand	O	O
7X9	SPOTLIGHT PROVISION - Left and right hand	O	O
6B4	TIRE RELOCATION - Spare tire relocated to LH rear compartment floor	O	O
B46	TRIM - Deluxe trunk	O	S
6H6	TRUNK OPENER - Right side of steering column (lower right of radio, replaces 6H7)	O	O
UV1	WIRING - Provision for Hughes DataVision™ heads-up display system for selected MDT information. (Reqs. roof reinforcement 6G2)	O	O
UV3	WIRING - Provision for Hughes DataVision™ heads-up display and Texas Instruments/Hughes NIGHTSIGHT™ low light video camera. (Reqs. roof reinforcement 6G2, roof wiring 6F5 & hole-6B7)	O	O
WX7	WIRING - Auxiliary speaker	O	O
6C8	WIRING - Coaxial radio antenna cable- RG58AU roof to trunk	O	O
6J1	WIRING - Ignition and main power supply (Replaces 7Z5 fuse block included in 9C1)	O	O
6J4	WIRING - For horn/siren circuit, inline connection for customer furnished switch	O	O
6F5	WIRING - Roof 10 wire (Requires 6B7 or 6J5 hole in roof. N/A w/UV8 mobile phone)	O	O
6J3	WIRING - For grille lights, grille light flasher and grille speaker	O	O

N/A = Not Available; O = Optional; S = Standard

Note: VASCAR adapter not available from Chevrolet. Contact Traffic Safety Systems Inc. (Manufacturer of Vascar) at 804-353-3826 to purchase Vascar Electronic Odometer Module.

Regular Production Options

No.	Description	Caprice Classic	B18 Option
AG1	ADJUSTER - Six-way power seat, driver (Requires AA7 power windows)	O	S
AG2	ADJUSTER - Six-way power seat, passenger; N/A with SEO 6C9 (Requires AG1)	O	O
U75	ANTENNA - Power	N/A	N/A
G80	AXLE - Rear, limited slip differential	O	O
C49	DEFOGGER - Rear window. If rear window defogger not desired, order R9W	O	O
T82	HEADLAMPS - Automatic on-off	N/A	N/A
KO5	HEATER - Engine block	O	O
AL0	KEYLESS ENTRY	N/A	N/A
C71	LAMPS - Front door courtesy	N/A	S
T87	LAMPS - Cornering	N/A	N/A
VK3	LICENSE PLATE BRACKET - Front	O	O
BF9	MAT DELETE - Carpeted front & rear	O	O
DC4	MIRROR - Inside rearview day/nite with reading lamps, requires rear reading lamps (C96) when DC4 is ordered	O	O
DF6	MIRROR - Inside rearview auto day/nite with reading lamps, requires rear reading lamps (C96) when DF6 is ordered	O	O
DE5	MIRRORS - Heated electric outside rear view	N/A	N/A
DD2	MIRRORS - Covered driver visor (covered passenger visor mirror std.)	O	S
D64	MIRRORS - Lighted vanity	N/A	N/A
DE3	MIRRORS - Outside dual electric remote	O	S
AP9	NET - Luggage area hold-down	O	S
DS4	PAINT - Two tone (Regular production paint only)	O	O
D90	PIN STRIPING - Body side (N/A with special paint)	O	O
U15	RADIO DELETE - Speakers, speaker wires and antenna remain	O	O
U10	RADIO - AM/FM Stereo, seek-scan, music search cassette, auto tone and digital clock	O	O
UM6	RADIO - AM/FM stereo, seek/scan with cassette and digital clock	O	O
K34	SPEED CONTROL - Electronic, with resume speed	O	O
V92	TRAILERING PACKAGE	N/A	N/A
B18	TRIM - Custom interior (includes AA7, AG1, AP9, B46, C71, DD2, DE3)	N/A	O
A90	TRUNK OPENER - Located in glove compartment	N/A	N/A
N91	WHEEL COVERS - Wire with locks	O	O
PB1	WHEEL COVERS - Deluxe (Plastic)	O	O
P03	WHEEL COVERS - Full stainless steel	O	O
PD4	WHEEL - Aluminum 15x7	N/A	N/A
UV8	WIRING - Delco Mobile Telephone provisions (N/A w/6F5 roof wiring)	O	O
AA7	WINDOWS - Power with driver express down and passenger lock-out switch on driver's door	O	S

N/A = Not Available; O = Optional; S = Standard

1995 Specifications and Dimensions

DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

GENERAL

Wheelbase:	115.9
Overall length:	214.1
Overall width:	77.5
Overall height:	55.7
Tread Front:	61.8
Tread Rear:	62.3

FRONT COMPARTMENT

Head room:	39.2
Shoulder Room:	63.4
Hip Room:	57.0
Leg Room: (Maximum)	42.2

REAR COMPARTMENT

Head Room:	37.9
Shoulder Room:	63.4
Hip Room:	56.9
Leg Room: (Minimum)	39.5

LUGGAGE COMPARTMENT CAPACITY

Luggage capacity (with space-saver) (cu. ft.)	20.4
EPA passenger compartment volume index (cu. ft.)	114.2

FULL TANK CAPACITY

(gal.)	23.0
--------	------

AERODYNAMICS

Coefficient of drag	.34
---------------------	-----

EPA FULL ECONOMY RATINGS

	CITY	HIGHWAY
4.3L Engine	18	26
5.7L Engine	17	25

Projected EPA label values, actual mileage will vary with options, driving conditions, driving habits and vehicle's condition.


ALTERNATOR

Type:	Delco CS-144
Amps	140
Amps @ idle	72/108

FEATURES:

- Sealed High Capacity Bearings
- Transient Voltage Spike Protection
- Low Power Consumption
- Vehicle Low Voltage Idle Boost Compatible
- Load Response Control
- Reduced RFI

CHEVROLET POLICE VS GENERATOR MAXIMUM OUTPUT

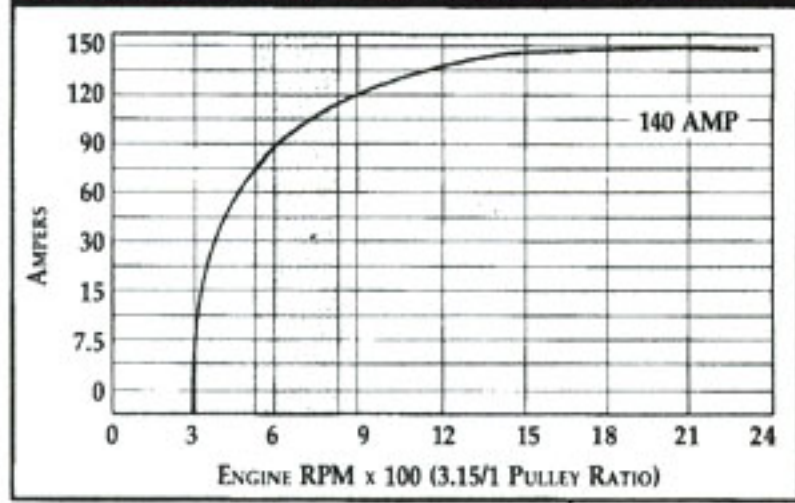

COMPUTER CONTROLLED IDLE SPEED RANGE (575-800 RPM)

ENGINE

	Std.	Opt.
Type:	(L99) V8	(LTI) V8
Displacement: Liters (cu. in.)	4.3 (265)	5.7 (350)
Horsepower/RPM:	200 @ 5200	260 @ 5000
Torque/RPM:	245 @ 2400	330 @ 3200
Induction System:	SFI	SFI
Compression Ratio:	9.9:1	10.0:1
Exhaust:	Single	Dual

TRANSMISSION

Automatic electronic with overdrive	4-speed
-------------------------------------	---------

BRAKES

Dual hydraulic, power system	Disc/Disc
Front: size/swept area (sq. in.)	12" x 1" / 242.3
Rear: size/swept area (sq. in.)	11.6" x .8" / 197.3
Total brake-swept area (sq. in.)	439.6

TIRES

Type:	All Season Speed Rated
Size: with 4.3 liter engine ('H' Rated)	P225/70R15
Size: with 5.7 liter engine ('V' Rated)	P235/70R15

WHEELS

Type:	Vented Steel
Size:	15 x 7

CHASSIS

Frame:	Full Perimeter Steel
Front Suspension:	Independent - SLA, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Rear Suspension:	Salisbury 4-Link, Coil Steel Alloy Spring, Steel Anti-Roll Bar, Tuned Shocks
Steering Type:	Power, Internal Gear with Power piston Vane Type Pump
Steering Ratio:	12.7:1

BATTERY

Type:	Delco Freedom
BCI Group Size:	78
Volts	12
Amp Hour Rating	69
Cold Cranking Amps @ 0°F (-18°C):	770
Reserve Capacity @ 80°F (27°C):	115

FEATURES:

- Maintenance-Free Design
- Built-In Hydrometer
- Reinforced Polypropylene Case
- Built-In Flame Arrester
- Side Mounted Terminals